




LEADING THROUGH INNOVATION

PRODUCT CATALOGUE

LUBRICATION EQUIPMENT

AUTOMOTIVE • PETROLEUM • INDUSTRIAL

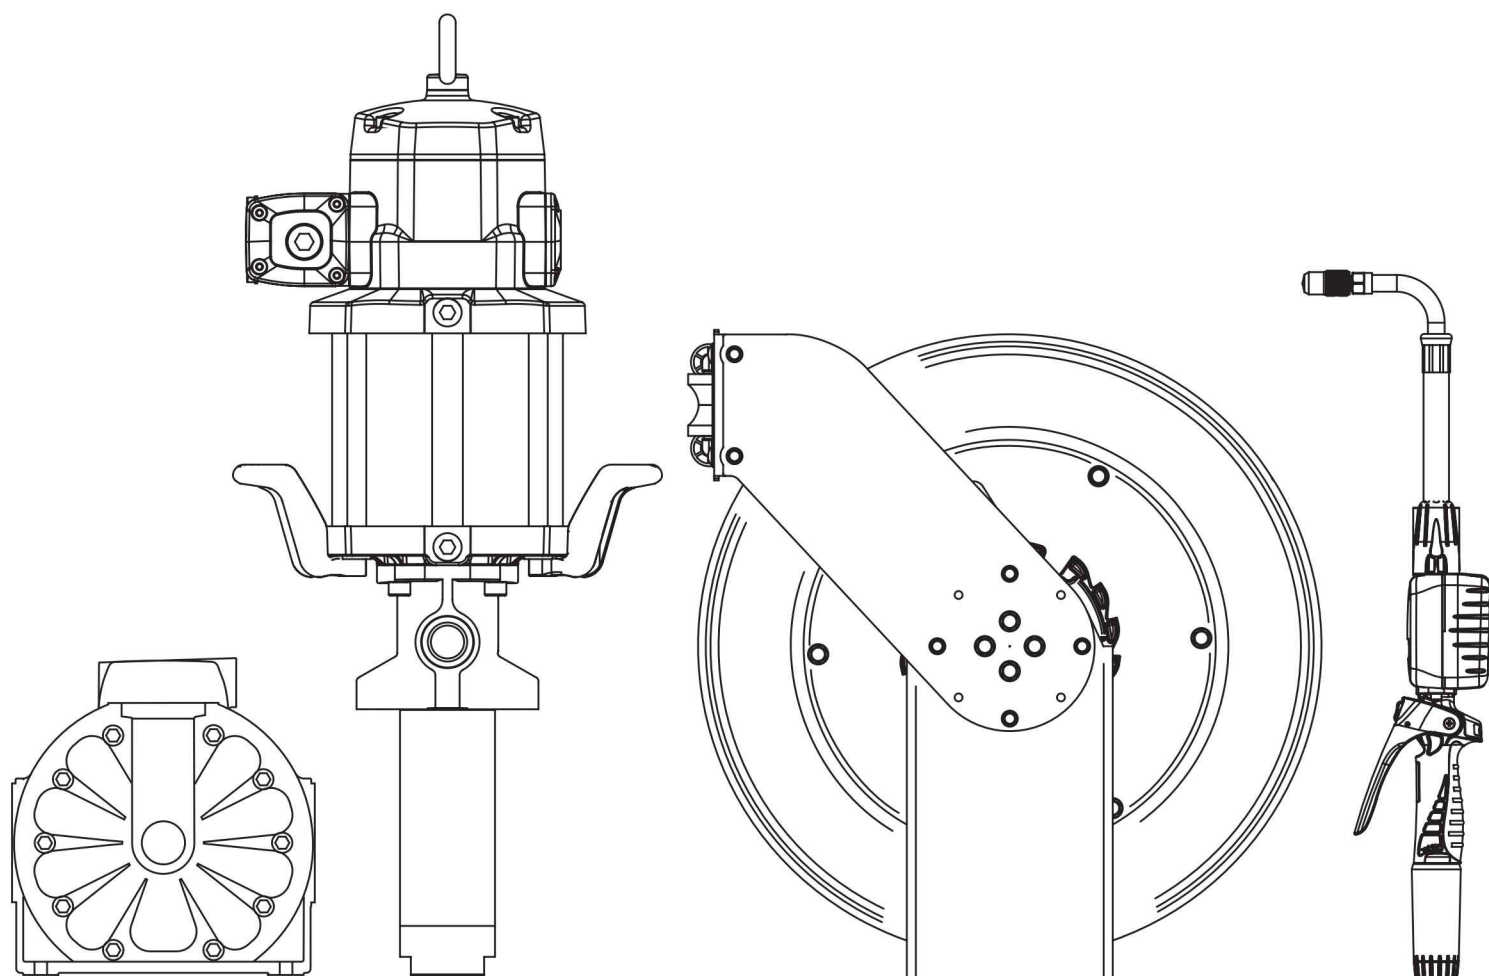

PUMPMaster 2 ACCESSORIES AND OTHER MOBILE OIL DISPENSERS



PUMPMaster 2 ACCESSORIES

360 102



360 102 Wall bracket
360 120 Floor bracket

360 120



360 001



**BUNG ADAPTORS 2" (M) CONNECTION
FOR DRUM AND TANKS BUNG OPENINGS**

360 000 Bung adaptor for PM2 3:1 pumps
Pump tube outside diameter: 34 mm.

360 001 Bung adaptor for PM2 1:1 pumps
Pump tube outside diameter: 52 mm.

367 000



SUCTION ASSEMBLIES AND SUCTION HOSES
Suction assemblies for wall mounted stub pumps. Assemblies include Ø 42 suction tube with foot valve, height adjustable 2" bung adaptor and 2 m x 3/4" rubber connection hose.

367 000 Suction assembly for 1,000 l IBC and 205 l drums
1,060 mm suction tube.

367 003 Suction assembly for tanks
1,600 mm suction tube.

367 011 spring reinforced transparent suction hose
For 205 l drums and 1,000 l IBC. 3 m x 3/4".

367 012 spring reinforced transparent suction hose with foot valve
For 205 l drums and 1,000 l IBC. 3 m x 3/4", includes foot valve.

367 102 Pump suction kit
Includes suction assemble 367 000 and pump bracket 360 102.

367 011



362 910



HOSE CONNECTION KIT

362 910 PM2 pump connection kit
1 m x 1/4" air hose 246 010, one 1/2" BSP (M) x 1/4" BSP (F) connection adapter 945 516, 1 m x 1/2" oil hose with 1/2" BSP (MM) fittings, one automatic quick air coupling 1/4" BSP (F) 253 114 and one quick air connector 1/4" BSP (M).

609 007



PRESSURE RELIEF VALVE

For protection against system pressure increase due to oil thermal expansion (1 °C increase in temperature can cause 10 bar increase in system pressure). 60 bar (870 psi) valve opening pressure. Possibility to connect either a Ø 1/4" hose with a clamp or a hose with 1/8" BSP (F) fitting as return line to the tank. SAMOA pumps include a 1/4" plug that can be removed and replaced with a pressure relief valve.

609 007 Pressure relief valve

Opens at approximately 60 bar. Possibility to connect either a 1/4" hose with a clamp or a hose with 1/8" BSP (F) fitting as oil return live.

OTHER MOBILE OIL DISPENSERS



PRESSURIZED LUBRICANT DISPENSERS 25 LITRES

Mobile unit for dispense viscous lubricants. Includes a 25 l container that must be pressurized using a tire inflator at maximum 7 bar (100 psi). Includes safety valve and 1.5 m delivery hose with oil gun.

324 000 Pressurized lubricant dispenser, 25 litres.

324 010 Pressurized lubricant dispenser, 25 litres with meter.



SELF CONTAINED AIR OPERATED LUBRICANT DISPENSER 25 LITRES

Mobile unit to dispense viscous lubricants. Includes a 25 l capacity tank, a 2:1 pneumatic pump, oil meter at pump outlet, 1.5 m delivery hose and oil gun with non-drip tip.

327 020 Self contained air operated lubricant dispenser with meter, 25 litres.



SELF CONTAINED HAND OPERATED LUBRICANT DISPENSERS 25 LITRES

Mobile unit to dispense viscous lubricants. Includes a 25 l capacity tank, a hand pump and a 1.5 m delivery hose with angled spout.

325 000 Self contained hand operated lubricant dispenser, 25 litres.

325 010 Self contained hand operated lubricant dispenser with meter, 25 litres. Includes in line meter at the pump outlet.



SELF CONTAINED HAND OPERATED LUBRICANT DISPENSERS 70 LITRES

Mobile unit to dispense viscous lubricants. Includes a 70 l capacity tank, a hand pump and a 1.5 m delivery hose with angled spout.

326 000 Self contained hand operated lubricant dispenser, 70 litres.

326 010 Self contained hand operated lubricant dispenser with meter, 70 l
Includes in line meter at the pump outlet.